




- DEDICATED PROFESSIONAL SUPPORT
- AN EXTENSIVE PORTFOLIO TO CHOOSE FROM
- FREE ONLINE INFORMATION RESOURCE
- QUICK & EFFICIENT SERVICE

PRODUCT INFORMATION

ADIGE/2.0 RANGE INFORMATION

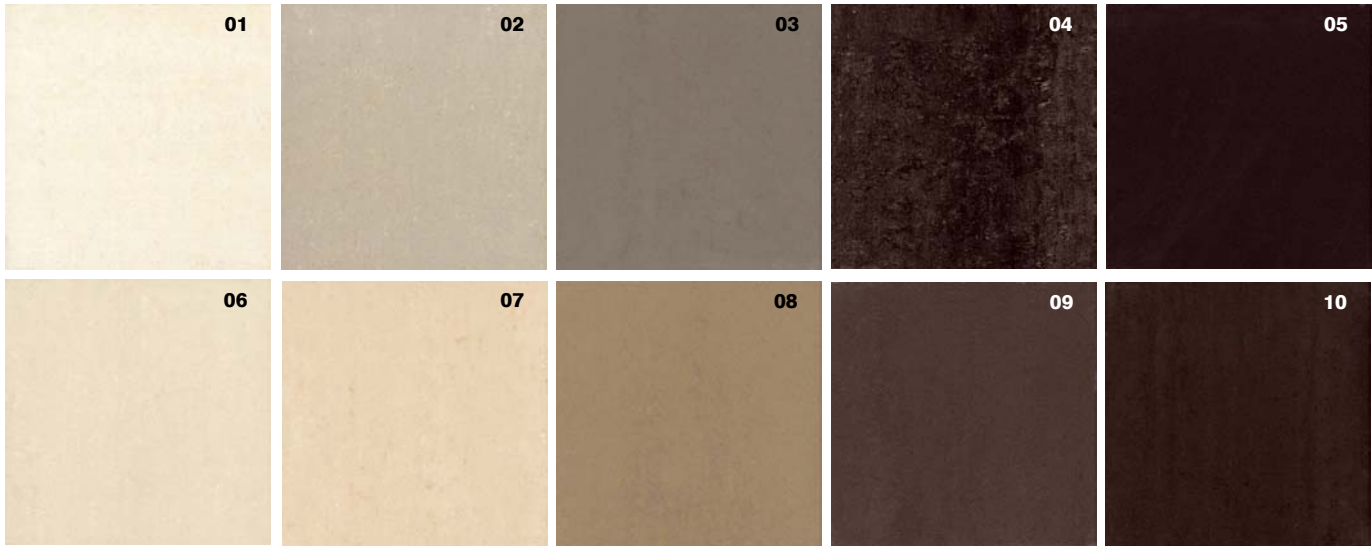

Disclaimer: The various finishes and sizes shown are not necessarily available in all colours. For specific information on size, finish and colour availability, please contact a PROSPEC representative.

Sizes Available:

300x300mm, 300x600mm, 450x450mm, 600x600mm, 200x1200mm, 600x1200mm, 50mm mosaic

Finishes Available:

Natural (Matt) Finish: Slip Resistance Rating = R9
 Structured Finish: Slip Resistance Rating = R11 (Barefoot Rating 'C')
 Polished Finish: Slip Resistance Rating = N/A

AT A GLANCE

Product Type

Unglazed Porcelain Stoneware

Finishes and Suitability

Finishes Available

Natural (Matt), Structured (Matt, Anti-Slip), Polished

Natural (Matt) Suitability

Interior Floors Only. Interior/Exterior Walls

Structured Suitability

Interior/Exterior use for Walls & Floors

Polished Suitability

Interior Floors Only. Interior/Exterior Walls

Areas of Use - Product Suitability

Domestic

Kitchens, bathrooms, conservatories, etc

YES

Residential

Hotels, housing, etc

YES

Public Areas - Light

Restaurants, offices, shops, etc

YES

Public Areas - Heavy

Shopping Centres, supermarkets

YES

Commercial

Airports, high density traffic areas, etc

YES

Industrial

Heavy Industrial Areas

NO



THE ESSENTIAL RESOURCE
 FOR CONTRACT TILE
 SPECIFICATION

For more information or to order a sample,
 please call **0115 939 5903**

or visit www.prospectiles.com

Slip Resistance

Natural(Matt) Finish: Slip Resistance Rating = R9
 Structured Finish: Slip Resistance Rating = R11 (Barefoot Rating 'C')
 Polished Finish: Slip Resistance Rating = N/A

Water Absorption

All Finishes: Conforms (acc to test criteria) (Conforms)

Acid & Alkali Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Thermal Shock Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Frost Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Deep Abrasion Resistance

All Finishes: (less than) <150mm3 (Conforms)

Bending Strength

All Finishes: 40 – 55 N/mm2 (Conforms)

TEST STANDARDS

DIN 51130
 ()=DIN 51097

EN 99


EN 106

EN 104

EN 202

EN 102

EN 100

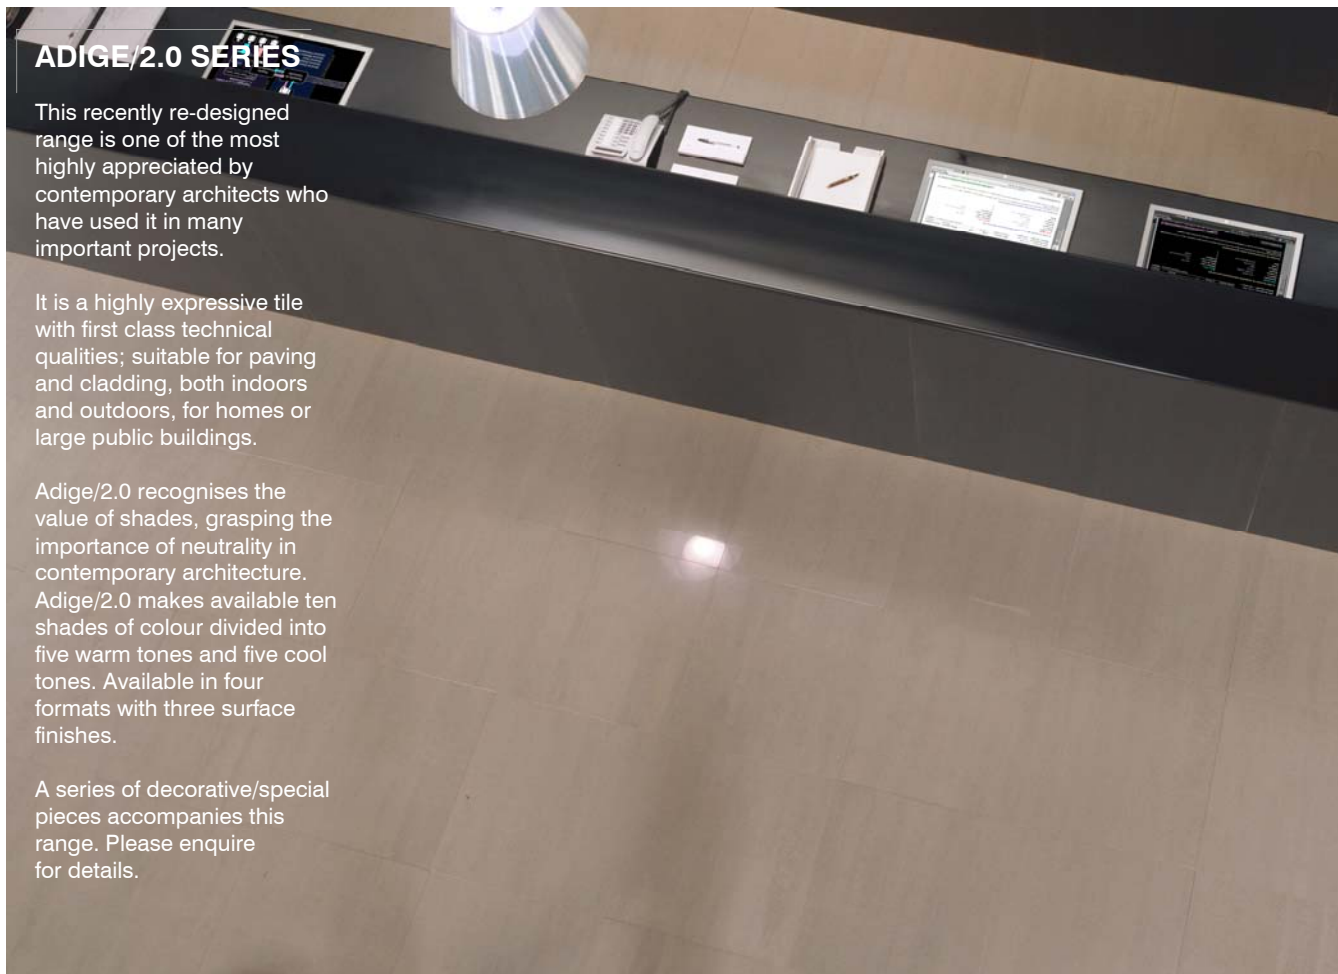

ADIGE/2.0 SERIES

This recently re-designed range is one of the most highly appreciated by contemporary architects who have used it in many important projects.

It is a highly expressive tile with first class technical qualities; suitable for paving and cladding, both indoors and outdoors, for homes or large public buildings.

Adige/2.0 recognises the value of shades, grasping the importance of neutrality in contemporary architecture. Adige/2.0 makes available ten shades of colour divided into five warm tones and five cool tones. Available in four formats with three surface finishes.

A series of decorative/special pieces accompanies this range. Please enquire for details.



THE ESSENTIAL RESOURCE
 FOR CONTRACT TILE
 SPECIFICATION

For more information or to order a sample,
 please call **0115 939 5903**

or visit www.prospectiles.com