




- DEDICATED PROFESSIONAL SUPPORT
- AN EXTENSIVE PORTFOLIO TO CHOOSE FROM
- FREE ONLINE INFORMATION RESOURCE
- QUICK & EFFICIENT SERVICE

PRODUCT INFORMATION

ECO RANGE INFORMATION

Matt Finish

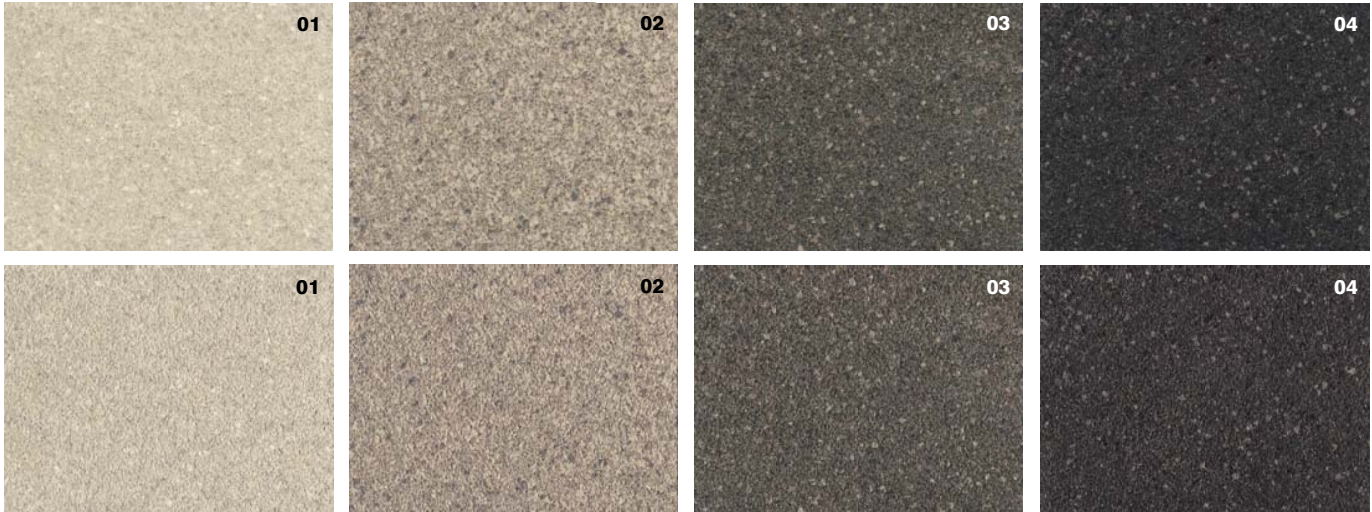

Anti-Slip Finish

Sizes Available:

200x400mm, 400x400mm, 400x800mm, 600x600mm,
600x1200mm, 50mm mosaic

NOTE: 200x400mm & 400x400mm available in 2 thicknesses – 11mm, 15mm



R11

Disclaimer: The various finishes and sizes shown are not necessarily available in all colours. For specific information on size, finish and colour availability, please contact a PROSPEC representative.

Finishes Available:

Natural (Matt): Slip Resistance Rating = R9
Structured (Anti-slip): Slip Resistance Rating = R11 (Barefoot Rating 'C')

AT A GLANCE

Product Type

Unglazed Porcelain Stoneware – Made from RECYCLED materials

Finishes and Suitability

Finishes Available

Natural (Matt), Structured (Anti-slip)

Natural(Matt) Suitability

Interior Floors Only. Interior/Exterior Walls

Structured(Anti-slip) Suitability

Interior/Exterior use for Walls & Floors

Areas of Use - Product Suitability

Domestic

Kitchens, bathrooms, conservatories, etc

YES

Residential

Hotels, housing, etc

YES

Public Areas - Light

Restaurants, offices, shops, etc

YES

Public Areas - Heavy

Shopping Centres, supermarkets

YES

Commercial

Airports, high density traffic areas, etc

YES

Industrial

Heavy Industrial Areas

YES (15mm thick)



THE ESSENTIAL RESOURCE
FOR CONTRACT TILE
SPECIFICATION

For more information or to order a sample,
please call 0115 939 5903

or visit www.prospectiles.com

Slip Resistance

Natural(Matt) Finish: Slip Resistance Rating = R9
 Structured (Anti-slip) Finish: Slip Resistance Rating = R11 (Barefoot Rating 'C')

Surface Hardness

Natural (Matt) Finish: MoHs Rating = 7-8 (Conforms)
 Structured (Anti-slip) Finish: MoHs Rating = 7-8 (Conforms)

Water Absorption

All Finishes: Conforms (acc to test criteria) (Conforms)

Acid & Alkali Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Thermal Shock Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Frost Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Deep Abrasion Resistance

All Finishes: (less than) <150mm3 (Conforms)

Bending Strength

All Finishes: 40 – 55 N/mm2 (Conforms)

TEST STANDARDS

DIN 51130
 ()=DIN 51097

EN 101

EN 99

EN 106

EN 104

EN 202

EN 102

EN 100

ECO SERIES

ECO is an exciting, sustainable and proactive way to support the environment.

ECO is a new and unique porcelain stone tile product that involves the recycling of up to 97% waste product to produce a new composite material.

ECO offers a range of 4 organic colours; light, grey, green and dark and boasts an extraordinary textured design, where the combination of grains and flakes results in an original melange effect, with a subtle hint of light-reflecting sparkle.

ECO is available in 2 surface finishes; Natural (Slip Resistance rating = R9) and Structured (Slip Resistance rating = R11 'C') and is suitable for both walls and floors and in all internal/external new build and refurbishment projects. The use of these two surfaces allows for a continuous look between interiors and exteriors.

ECO is an exceptionally versatile product; it is virtually maintenance free.

A series of decorative/special pieces accompanies this range. Please enquire for details.

