




- DEDICATED PROFESSIONAL SUPPORT
- AN EXTENSIVE PORTFOLIO TO CHOOSE FROM
- FREE ONLINE INFORMATION RESOURCE
- QUICK & EFFICIENT SERVICE

PRODUCT INFORMATION

INTECH RANGE INFORMATION

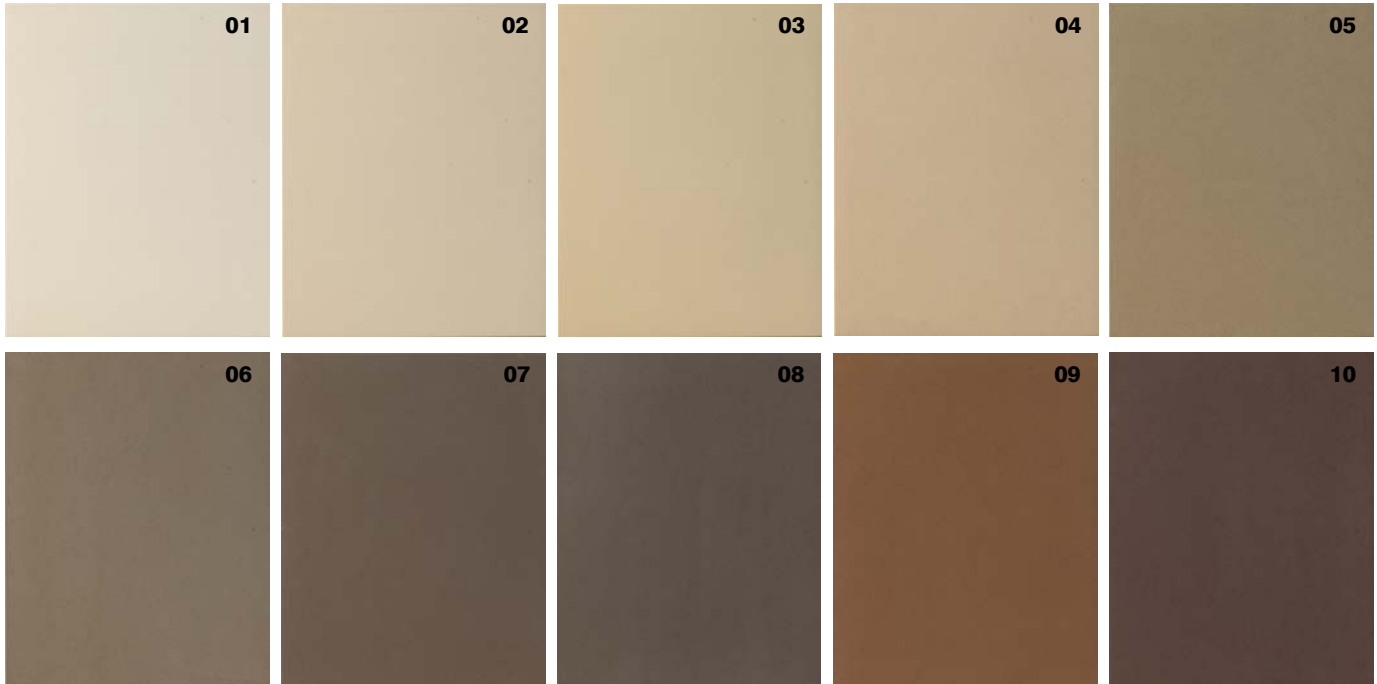

Disclaimer: The various finishes and sizes shown are not necessarily available in all colours. For specific information on size, finish and colour availability, please contact a PROSPEC representative.

Sizes Available:

100x600mm R, 200x200mm R, 200x800mm R, 400x400mm R, 400x800mm R, 600x600mm R, 600x1200mm, Various mosaic options

Finishes Available:

Natural (Matt): Slip Resistance Rating = R9
 Bush Hammered: Slip Resistance Rating = R11 (Barefoot Rating 'B')
 Polished: Slip Resistance Rating = N/A

AT A GLANCE

Product Type

Unglazed Porcelain Stoneware

Finishes and Suitability

Finishes Available

Natural (Matt), Bush Hammered (Matt, Anti-Slip), Polished

Natural (Matt) Suitability

Interior Floors Only. Interior/Exterior Walls

Anti-Slip (B/hammered) Suitability

Interior/Exterior use for Walls & Floors

Polished Suitability

Interior Floors Only. Interior/Exterior Walls

Areas of Use - Product Suitability

Domestic

Kitchens, bathrooms, conservatories, etc

YES

Residential

Hotels, housing, etc

YES

Public Areas - Light

Restaurants, offices, shops, etc

YES

Public Areas - Heavy

Shopping Centres, supermarkets

YES

Commercial

Airports, high density traffic areas, etc

YES

Industrial

Heavy Industrial Areas

NO



THE ESSENTIAL RESOURCE
 FOR CONTRACT TILE
 SPECIFICATION

For more information or to order a sample,
 please call 0115 939 5903

or visit www.prospectiles.com

Slip Resistance

Natural(Matt) Finish: Slip Resistance Rating = R9
 Bush Hammered Finish: Slip Resistance Rating = R11 (Barefoot Rating 'B')
 Polished Finish: Slip Resistance Rating = N/A

Water Absorption

All Finishes: Conforms (acc to test criteria) (Conforms)

Acid & Alkali Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Thermal Shock Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Frost Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Deep Abrasion Resistance

All Finishes: (less than) <140mm3 (Conforms)

Bending Strength

All Finishes: 47> N/mm2 (Conforms)

TEST STANDARDS

DIN 51130
 ()=DIN 51097

EN ISO 10545-03

EN ISO 10545-13

EN ISO 10545-09

EN ISO 10545-12

EN ISO 10545-06

EN ISO 10545-04

INTECH SERIES

INTECH represents a new conception of design that promotes harmony between the basic elements of nature and human beings, creating a balance between the created environment and the natural environment.

INTECH is based upon continuous research of modern architectural awareness and its relationship with organic matter.

INTECH comprises 10 colours, available in multiple finishes and sizes, to create endless freedom in the design of our built environment.

A series of decorative/special pieces accompanies this range. Please enquire for details.



THE ESSENTIAL RESOURCE
 FOR CONTRACT TILE
 SPECIFICATION

For more information or to order a sample,
 please call 0115 939 5903

or visit www.prospectiles.com