




- DEDICATED PROFESSIONAL SUPPORT
- AN EXTENSIVE PORTFOLIO TO CHOOSE FROM
- FREE ONLINE INFORMATION RESOURCE
- QUICK & EFFICIENT SERVICE

PRODUCT INFORMATION

QUARRY RANGE INFORMATION

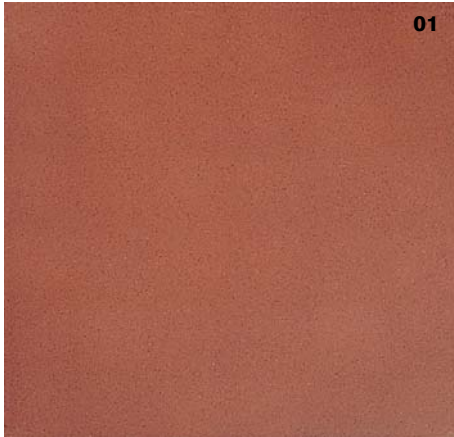

Floor Tile: **QUARRY COLOUR: 01**

Disclaimer: The various finishes and sizes shown are not necessarily available in all colours. For specific information on size, finish and colour availability, please contact a PROSPEC representative.

Colours Available



Sizes Available:
150x150mm

Finishes Available:

Natural (Matt) Finish: Slip Resistance Rating = R9

Profiled Finish: Slip Resistance Rating = R11 (Barefoot Rating 'C')

Carborundum Finish: Slip Resistance Rating = R10/R11 (Barefoot Rating 'B/C') (Guide Only)



AT A GLANCE

Product Type

Unglazed Dust-Pressed Ceramic - Quarry Tile

Finishes and Suitability

Finishes Available

Natural (Matt), Profiled, Carborundum

Suitability

Interior/Exterior use for Walls & Floors

Areas of Use - Product Suitability

Domestic

Kitchens, bathrooms, conservatories, etc

YES

Residential

Hotels, housing, etc

YES

Public Areas - Light

Restaurants, offices, shops, etc

YES

Public Areas - Heavy

Shopping Centres, supermarkets

YES

Commercial

Airports, high density traffic areas, etc

YES

Industrial

Heavy Industrial Areas

NO



THE ESSENTIAL RESOURCE
FOR CONTRACT TILE
SPECIFICATION

For more information or to order a sample,
please call **0115 939 5903**

or visit www.prospectiles.com

Slip Resistance

Natural (Matt) Finish: Slip Resistance Rating
 Profiled Finish: Slip Resistance Rating

= R9
 = R11 (Barefoot Rating 'C')

Carborundum Finish: Slip Resistance Rating

= R10/R11 (Barefoot Rating 'B/C')

Surface Hardness

Natural (Matt) Finish: MoHs Rating
 Profiled Finish: MoHs Rating
 Carborundum (Matt) Finish: MoHs Rating

= 7 (Conforms)
 = 7 (Conforms)
 = 7 (Conforms)

Water Absorption

All Finishes: (less than) <3.0% (Conforms)

Acid & Alkali Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Thermal Shock Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Frost Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Deep Abrasion Resistance

All Finishes: (less than) <205mm³ (Conforms)

Bending Strength

All Finishes: 34 N/mm² (Conforms)

TEST STANDARDS

DIN 51130
 ()=DIN 51097

NO TEST DATA
 Guide only

EN 101

EN 99

EN 106

EN 104

EN 202

EN 102

EN 100

QUARRY SERIES

A simple, yet versatile product range. An unglazed, slip resistant, frost resistant range with lightly rounded edges that help prevent damage to the edge of the tile from wheeled traffic.

A small format contract tile suitable for all architectural projects; including residential, public areas and commercial.

A series of decorative/special pieces accompanies this range. Please enquire for details.

