



- DEDICATED PROFESSIONAL SUPPORT
- AN EXTENSIVE PORTFOLIO TO CHOOSE FROM
- FREE ONLINE INFORMATION RESOURCE
- QUICK & EFFICIENT SERVICE

## PRODUCT INFORMATION




### BREMBO RANGE INFORMATION



Floor Tile: **BREMBO COLOUR: 04**

Disclaimer: The various finishes and sizes shown are not necessarily available in all colours. For specific information on size, finish and colour availability, please contact a PROSPEC representative.

#### Colours Available



#### Sizes Available:

300x300mm, 300x600mm, 450x450mm

#### Finishes Available:

Natural (Matt) Finish: Slip Resistance Rating = R10



### AT A GLANCE

#### Product Type

Unglazed Porcelain Stoneware

#### Finishes and Suitability

##### Finishes Available

Natural (Matt)

##### Suitability

Interior/Exterior use for Walls & Floors

#### Areas of Use - Product Suitability

##### Domestic

Kitchens, bathrooms, conservatories, etc

YES

##### Residential

Hotels, housing, etc

YES

##### Public Areas - Light

Restaurants, offices, shops, etc

YES

##### Public Areas - Heavy

Shopping Centres, supermarkets

YES

##### Commercial

Airports, high density traffic areas, etc

YES

##### Industrial

Heavy Industrial Areas

NO



THE ESSENTIAL RESOURCE  
FOR CONTRACT TILE  
SPECIFICATION

For more information or to order a sample,  
please call **0115 939 5903**

or visit [www.prospectiles.com](http://www.prospectiles.com)

## Slip Resistance

Natural (Matt) Finish: Slip Resistance Rating = R10

## Surface Hardness

Natural (Matt) Finish: MoHs Rating = 7-8 (Conforms)

## Water Absorption

All Colours: Conforms (acc to test criteria) (Conforms)

## Acid & Alkali Resistance

All Colours: Resistant (acc to test criteria) (Conforms)

## Thermal Shock Resistance

All Colours: Resistant (acc to test criteria) (Conforms)

## Frost Resistance

All Colours: Resistant (acc to test criteria) (Conforms)

## Deep Abrasion Resistance

All Colours: (less than) <150mm<sup>3</sup> (Conforms)

## Bending Strength

All Colours: 40 – 55 N/mm<sup>2</sup> (Conforms)

## TEST STANDARDS

DIN 51130

EN 101

EN 99

EN 106

EN 104

EN 202

EN 102

EN 100


## BREMBO SERIES

The five colourways draw their inspiration from the natural physical texture of stones.

Due to the high technical standards of the product the range's quality and strength allows its usage either internally or externally, for both residential and commercial projects.

The textured surface finish of the tile provides a slip resistant finish.

A series of decorative/special pieces accompanies this range. Please enquire for details.

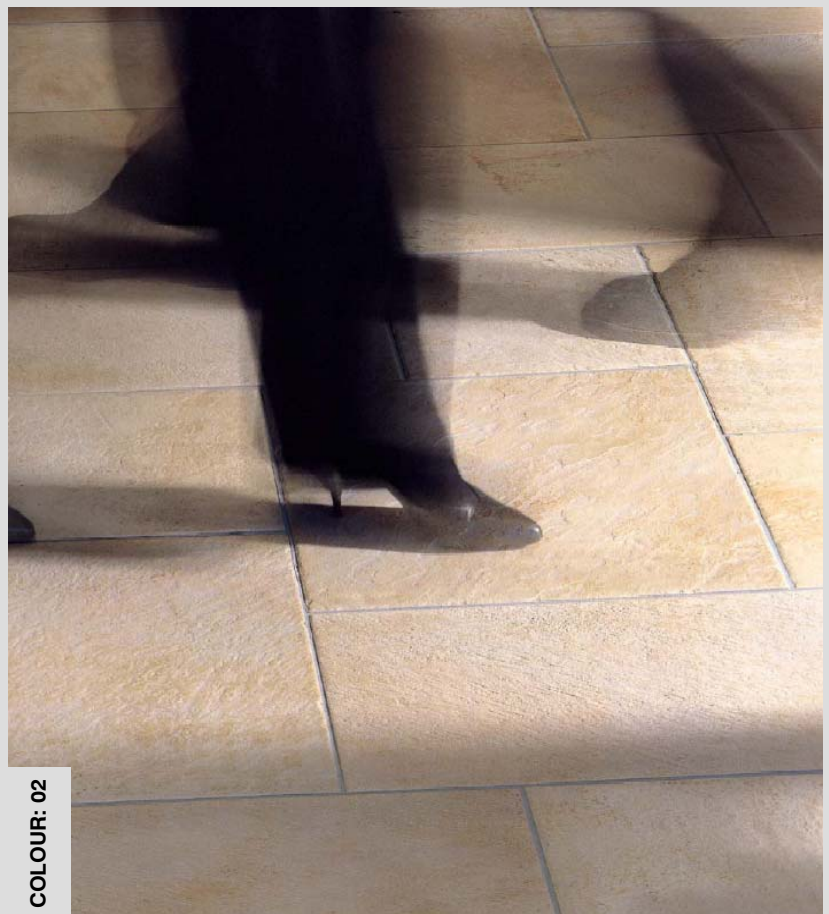

COLOUR: 02