




- DEDICATED PROFESSIONAL SUPPORT
- AN EXTENSIVE PORTFOLIO TO CHOOSE FROM
- FREE ONLINE INFORMATION RESOURCE
- QUICK & EFFICIENT SERVICE

PRODUCT INFORMATION


SPACE RANGE INFORMATION

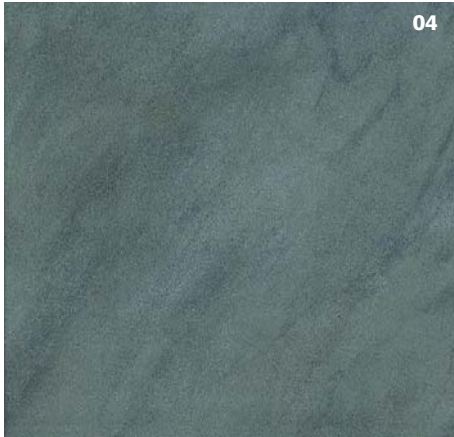

Floor Tile: **SPACE COLOUR: 04**

Disclaimer: The various finishes and sizes shown are not necessarily available in all colours. For specific information on size, finish and colour availability, please contact a PROSPEC representative.

Colours Available

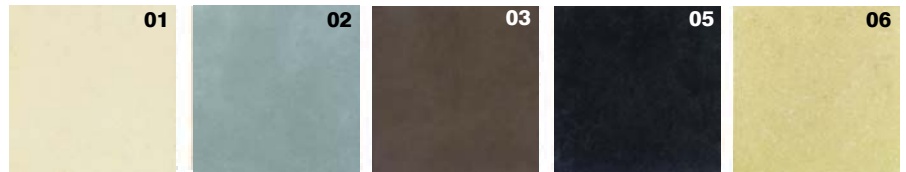

Sizes Available:

456x456mm, 609x608mm, 150x600mm, 400x600mm, 450x450mm, 600x600mm

Finishes Available:

Natural (Matt) Finish: Slip Resistance Rating = R9
 Honed Finish: Slip Resistance Rating = N/A

AT A GLANCE

Product Type

Unglazed Porcelain Stoneware

Finishes and Suitability

Finishes Available

Natural (Matt), Honed

Natural (Matt) Suitability :

Interior/Exterior use for Walls & Floors

Honed Suitability :

Interior Floors Only. Interior/Exterior Walls

Areas of Use - Product Suitability

Domestic

Kitchens, bathrooms, conservatories, etc

YES

Residential

Hotels, housing, etc

YES

Public Areas - Light

Restaurants, offices, shops, etc

YES

Public Areas - Heavy

Shopping Centres, supermarkets

YES

Commercial

Airports, high density traffic areas, etc

YES

Industrial

Heavy Industrial Areas

NO



THE ESSENTIAL RESOURCE
 FOR CONTRACT TILE
 SPECIFICATION

For more information or to order a sample,
 please call **0115 939 5903**

or visit www.prospectiles.com

Slip Resistance

Natural (Matt) Finish: Slip Resistance Rating = R9
 Honed Finish: Slip Resistance Rating = N/A

Surface Hardness

Natural (Matt) Finish: MoHs Rating = 7-8 (Conforms)
 Honed Finish: MoHs Rating = N/A (Conforms)

Water Absorption

All Finishes: Conforms (acc to test criteria) (Conforms)

Acid & Alkali Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Thermal Shock Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Frost Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Deep Abrasion Resistance

All Finishes: (less than) <150mm³ (Conforms)

Bending Strength

All Finishes: 40 – 55 N/mm² (Conforms)

TEST STANDARDS

DIN 51130

EN 101

EN 99

EN 106

EN 104

EN 202

EN 102

EN 100

SPACE SERIES

This range has been developed in line with the latest trends in architecture and interior design, combining advanced technology, stunning looks and durability.

The tile is characterised by a soft surface finish; dull with a rather silky finish, smooth but not reflecting light, with precise calibration for an almost seamless floor finish.

A range versatile enough for use in domestic environments as well as demanding commercial projects.

A series of decorative/special pieces accompanies this range. Please enquire for details.



COLOUR: 04