




- DEDICATED PROFESSIONAL SUPPORT
- AN EXTENSIVE PORTFOLIO TO CHOOSE FROM
- FREE ONLINE INFORMATION RESOURCE
- QUICK & EFFICIENT SERVICE

PRODUCT INFORMATION


SPECKLE RANGE INFORMATION

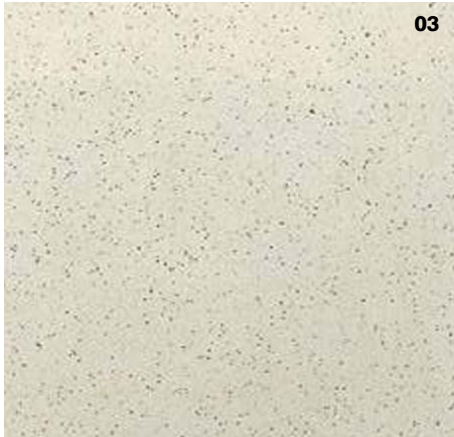

Floor Tile: **SPECKLE COLOUR: 03**

Disclaimer: The various finishes and sizes shown are not necessarily available in all colours. For specific information on size, finish and colour availability, please contact a PROSPEC representative.

Examples of Colours Available

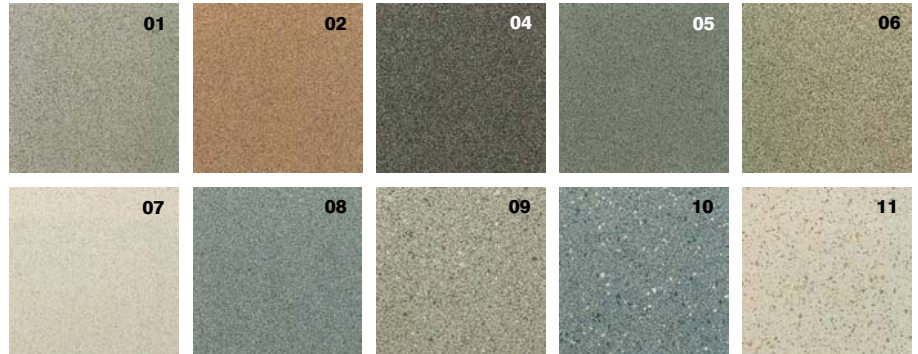

Sizes Available:
200x200mm, 300x300mm

Finishes Available:
Natural (Matt) Finish: Slip Resistance Rating = R9
Structured Finish: Slip Resistance Rating = R10
Polished Finish: Slip Resistance Rating = N/A



AT A GLANCE

Product Type

Unglazed Porcelain Stoneware

Finishes and Suitability

Finishes Available

Natural (Matt), Structured, Polished

Natural (Matt) Suitability

Interior/Exterior use for Walls & Floors

Structured Suitability

Interior/Exterior use for Walls & Floors

Polished Suitability

Interior Floors Only. Interior/Exterior Walls

Areas of Use - Product Suitability

Domestic

Kitchens, bathrooms, conservatories, etc

YES

Residential

Hotels, housing, etc

YES

Public Areas - Light

Restaurants, offices, shops, etc

YES

Public Areas - Heavy

Shopping Centres, supermarkets

YES

Commercial

Airports, high density traffic areas, etc

YES

Industrial

Heavy Industrial Areas

NO



THE ESSENTIAL RESOURCE
FOR CONTRACT TILE
SPECIFICATION

For more information or to order a sample,
please call **0115 939 5903**

or visit www.prospectiles.com

Slip Resistance

Natural (Matt) Finish: Slip Resistance Rating = R9
 Structured Finish: Slip Resistance Rating = R10
 Polished Finish: Slip Resistance Rating = N/A

Surface Hardness

Natural (Matt) Finish: MoHs Rating = 7-8 (Conforms)
 Structured Finish: MoHs Rating = 7-8 (Conforms)
 Polished Finish: MoHs Rating = N/A (Conforms)

Water Absorption

All Finishes: (less than) < 0.1% (Conforms)

Acid & Alkali Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Thermal Shock Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Frost Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

Deep Abrasion Resistance

All Finishes: (less than) <150mm³ (Conforms)

Bending Strength

All Finishes: 40 – 55 N/mm² (Conforms)

TEST STANDARDS

DIN 51130

EN 101

EN 99

EN 106

EN 104

EN 202

EN 102

EN 100

SPECKLE SERIES

A simple, yet versatile product with micro-grain texture for both wall and floor applications.

Suitable for all architectural projects including residential, public areas and commercial.

11 colours, 2 sizes and 3 finishes provide a classic, versatile contract range.

A series of decorative/special pieces accompanies this range. Please enquire for details.

