



- DEDICATED PROFESSIONAL SUPPORT
- AN EXTENSIVE PORTFOLIO TO CHOOSE FROM
- FREE ONLINE INFORMATION RESOURCE
- QUICK & EFFICIENT SERVICE

## PRODUCT INFORMATION


### CORINTH RANGE INFORMATION



Floor Tile: **CORINTH COLOUR: 03**

Disclaimer: The various finishes and sizes shown are not necessarily available in all colours. For specific information on size, finish and colour availability, please contact a PROSPEC representative.

#### Colours Available

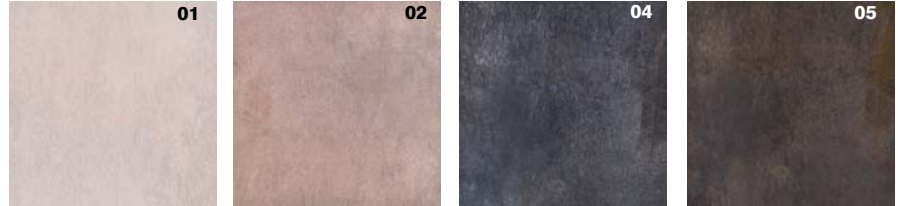

#### Sizes Available:

300x600mm, 400x400mm, various mosaic

#### Finishes Available:

Natural (Matt) Finish: Slip Resistance Rating = R9  
Semi-polished Finish: Slip Resistance Rating = N/A

### AT A GLANCE

#### Product Type

Unglazed Porcelain Stoneware

#### Finishes and Suitability

##### Finishes Available

Natural (Matt), Semi-polished

##### Suitability

Interior/Exterior use for Walls & Floors

#### Areas of Use - Product Suitability

<b>Domestic</b>	Kitchens, bathrooms, conservatories, etc	YES
<b>Residential</b>	Hotels, housing, etc	YES
<b>Public Areas - Light</b>	Restaurants, offices, shops, etc	YES
<b>Public Areas - Heavy</b>	Shopping Centres, supermarkets	YES
<b>Commercial</b>	Airports, high density traffic areas, etc	YES
<b>Industrial</b>	Heavy Industrial Areas	NO



THE ESSENTIAL RESOURCE  
FOR CONTRACT TILE  
SPECIFICATION

For more information or to order a sample,  
please call **0115 939 5903**

or visit [www.prospectiles.com](http://www.prospectiles.com)

## Slip Resistance

Natural (Matt) Finish: Slip Resistance Rating = R9  
 Semi-polished Finish: Slip Resistance Rating = N/A

## Surface Hardness

Natural (Matt) Finish: MoHs Rating = 7 (Conforms)  
 Semi-polished Finish: Slip Resistance Rating = N/A

## Water Absorption

All Finishes: (between) 0.0 - 0.1% (Conforms)

## Acid & Alkali Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

## Thermal Shock Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

## Frost Resistance

All Finishes: Resistant (acc to test criteria) (Conforms)

## Deep Abrasion Resistance

All Finishes: (between) 110 - 130mm<sup>3</sup> (Conforms)

## Bending Strength

All Finishes: 45 – 55 N/mm<sup>2</sup> (Conforms)

## TEST STANDARDS

DIN 51130

EN 101

EN ISO 10545-03

EN ISO 10545-13

EN ISO 10545-09

EN ISO 10545-12

EN ISO 10545-06

EN ISO 10545-04

## CORINTH SERIES

A stunning range comprising five contemporary and rich colourways.

Available in two formats and two finishes; matt and semi-polished. This series also has an accompaniment of various mosaic pieces, which can be used to provide a decorative effect on walls as well as floor installations.

A flexible range which is suitable for projects up to a commercial level.

A series of decorative/special pieces accompanies this range. Please enquire for details.



COLOUR: 03